

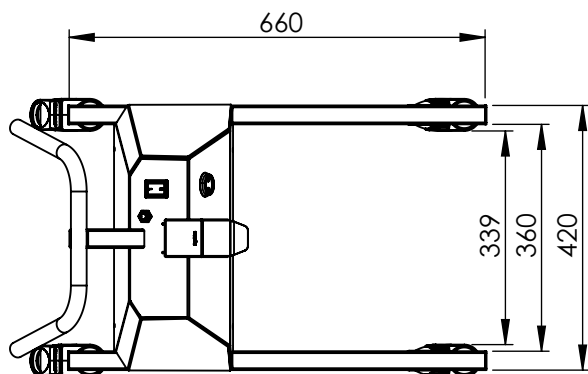


Standard chassis

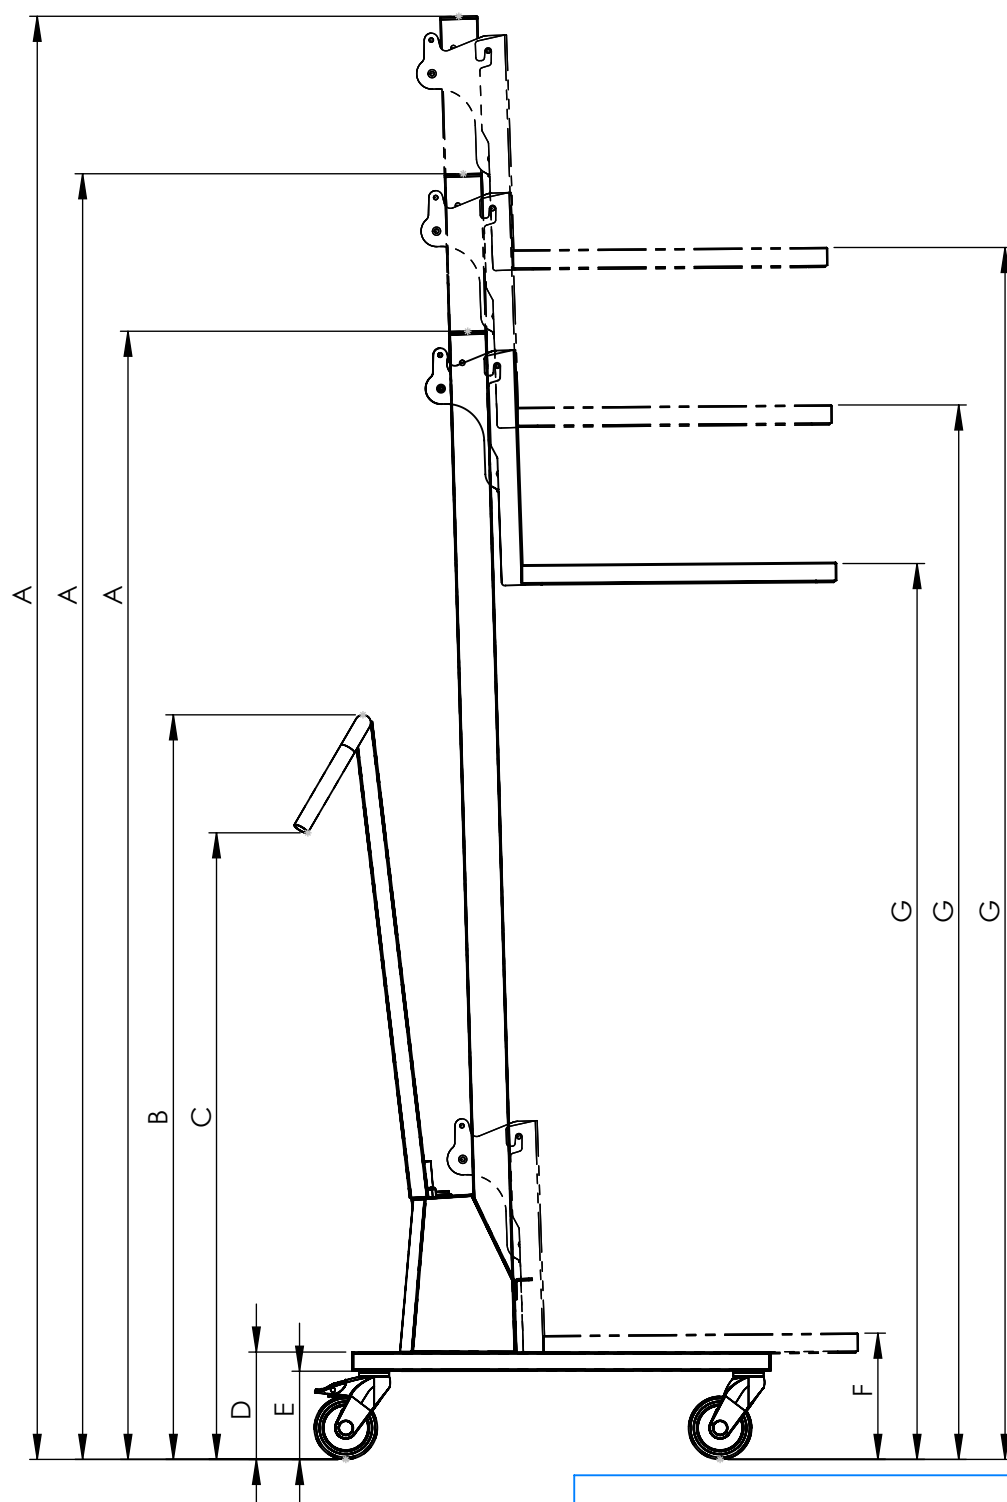

Optional chassis

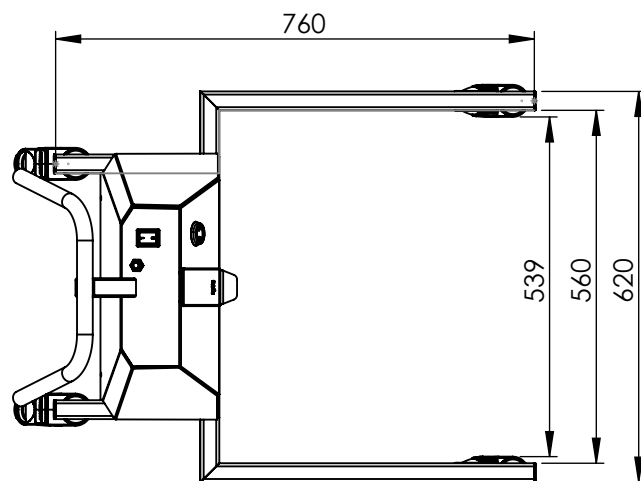


*+-10mm



Depends on battery capacity,
placement of load,
temperature, humidity.

			Wheels	
Standard			Ø100	Ø125
A			1790	1810
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			200	220
G	Load	0 kg	1415*	1435*
		40 kg	1395*	1415*
		80 kg	1355*	1375*
+250 height			Ø100	Ø125
A			2040	2060
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			200	220
G	Load	0 kg	1670*	1690*
		40 kg	1650*	1670*
		80 kg	1625*	1645*
+500 height			Ø100	Ø125
A			2290	2310
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			200	220
G	Load	0 kg	1915*	1935*
		40 kg	1885*	1905*
		80 kg	1835*	1855*

Standard chassis

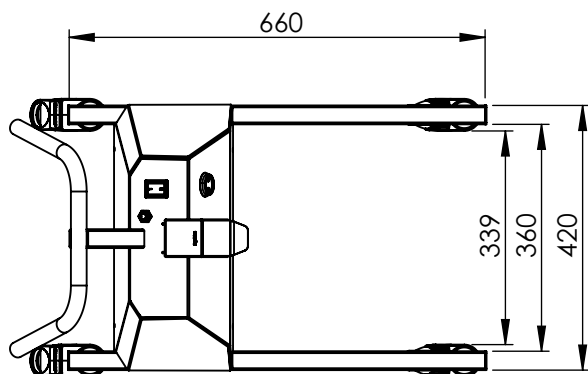

Optional chassis

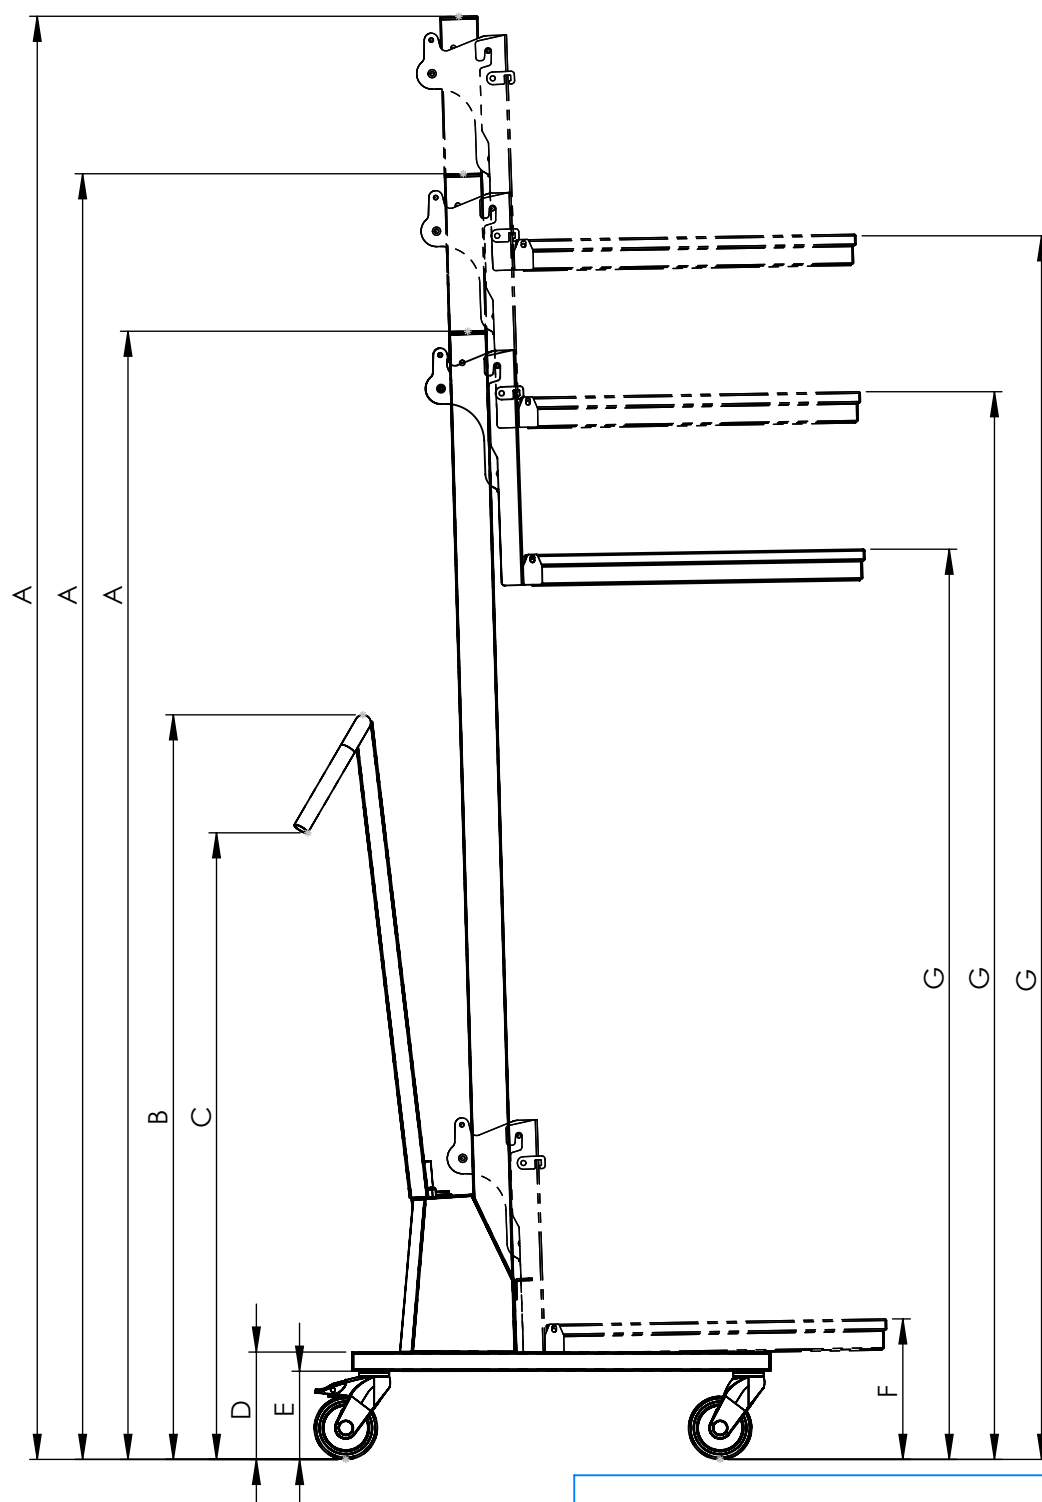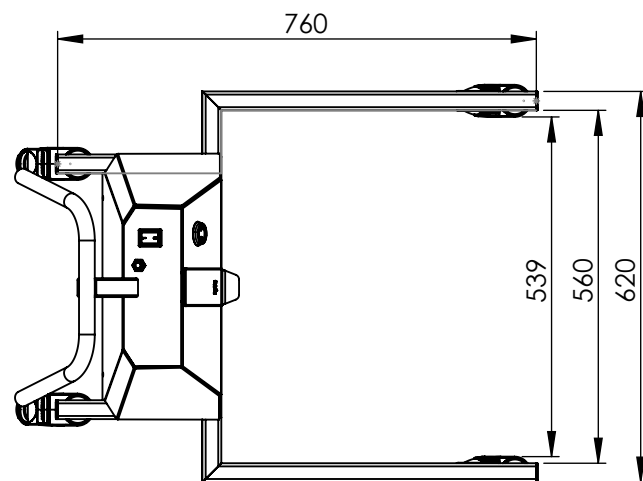


*+-10mm



Depends on battery capacity,
placement of load,
temperature, humidity.

			Wheels	
Standard			Ø100	Ø125
A			1790	1810
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			220	240
G	Load	0 kg	1435*	1455*
		40 kg	1410*	1430*
		80 kg	1375*	1395*
+250 height			Ø100	Ø125
A			2040	2060
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			220	240
G	Load	0 kg	1680*	1700*
		40 kg	1660*	1680*
		80 kg	1635*	1655*
+500 height			Ø100	Ø125
A			2290	2310
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			220	240
G	Load	0 kg	1925*	1945*
		40 kg	1905*	1925*
		80 kg	1880*	1900*

Standard chassis

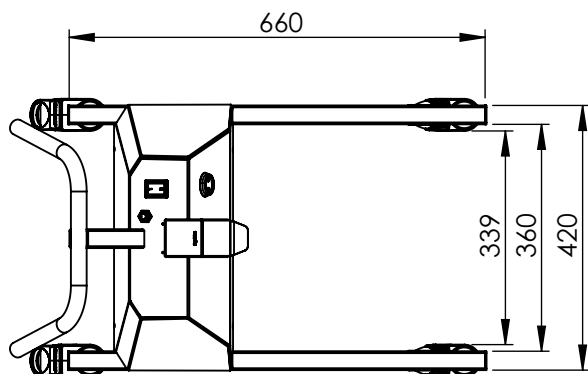



Optional chassis

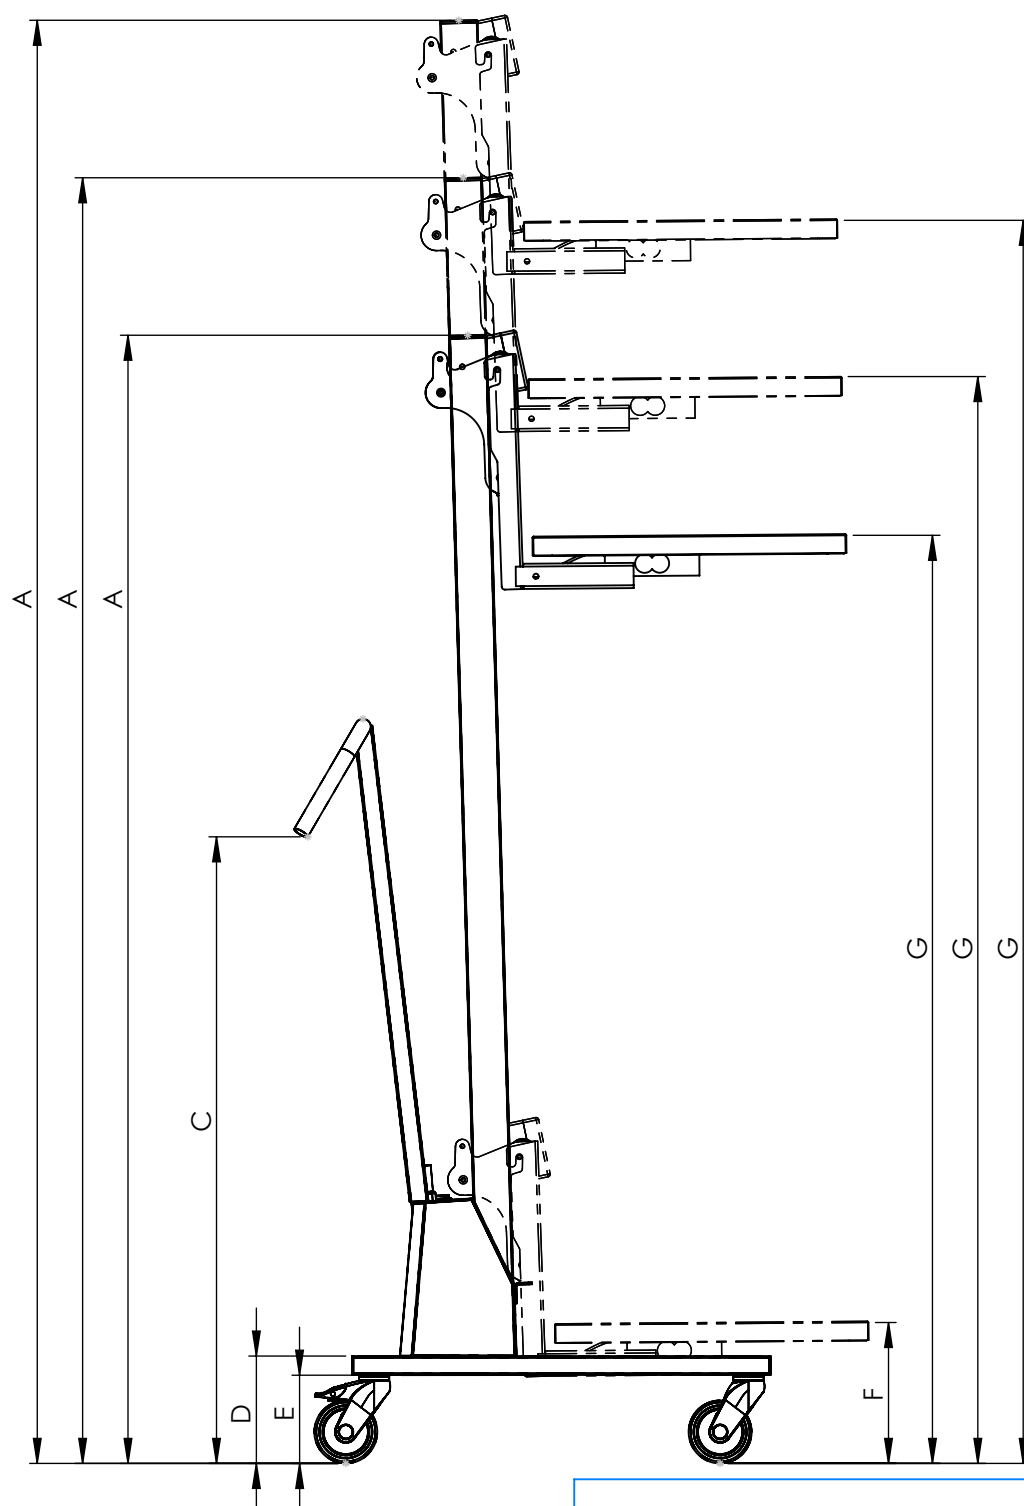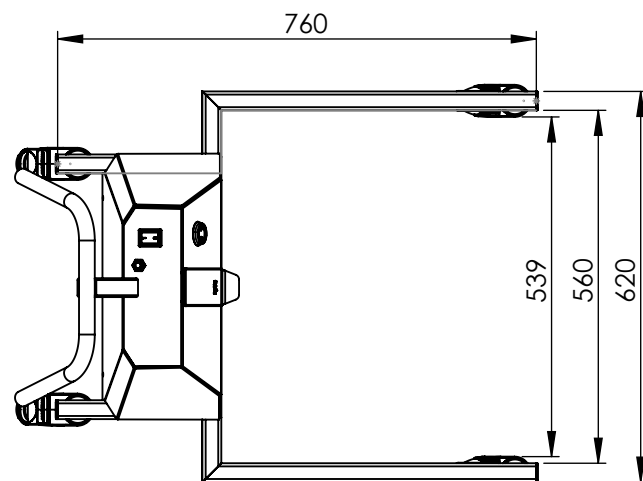

*+-10mm

Depends on battery capacity,
placement of load,
temperature, humidity.

			Wheels	
Standard			Ø100	Ø125
A			1790	1810
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			235	255
G	Load	0 kg	1480*	1500*
		40 kg	1460*	1480*
		80 kg	1425*	1445*
+250 height			Ø100	Ø125
A			2040	2060
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			235	255
G	Load	0 kg	1720*	1740*
		40 kg	1695*	1715*
		80 kg	1660*	1680*
+500 height			Ø100	Ø125
A			2290	2310
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			235	255
G	Load	0 kg	1960*	1980*
		40 kg	1930*	1950*
		80 kg	1905*	1925*

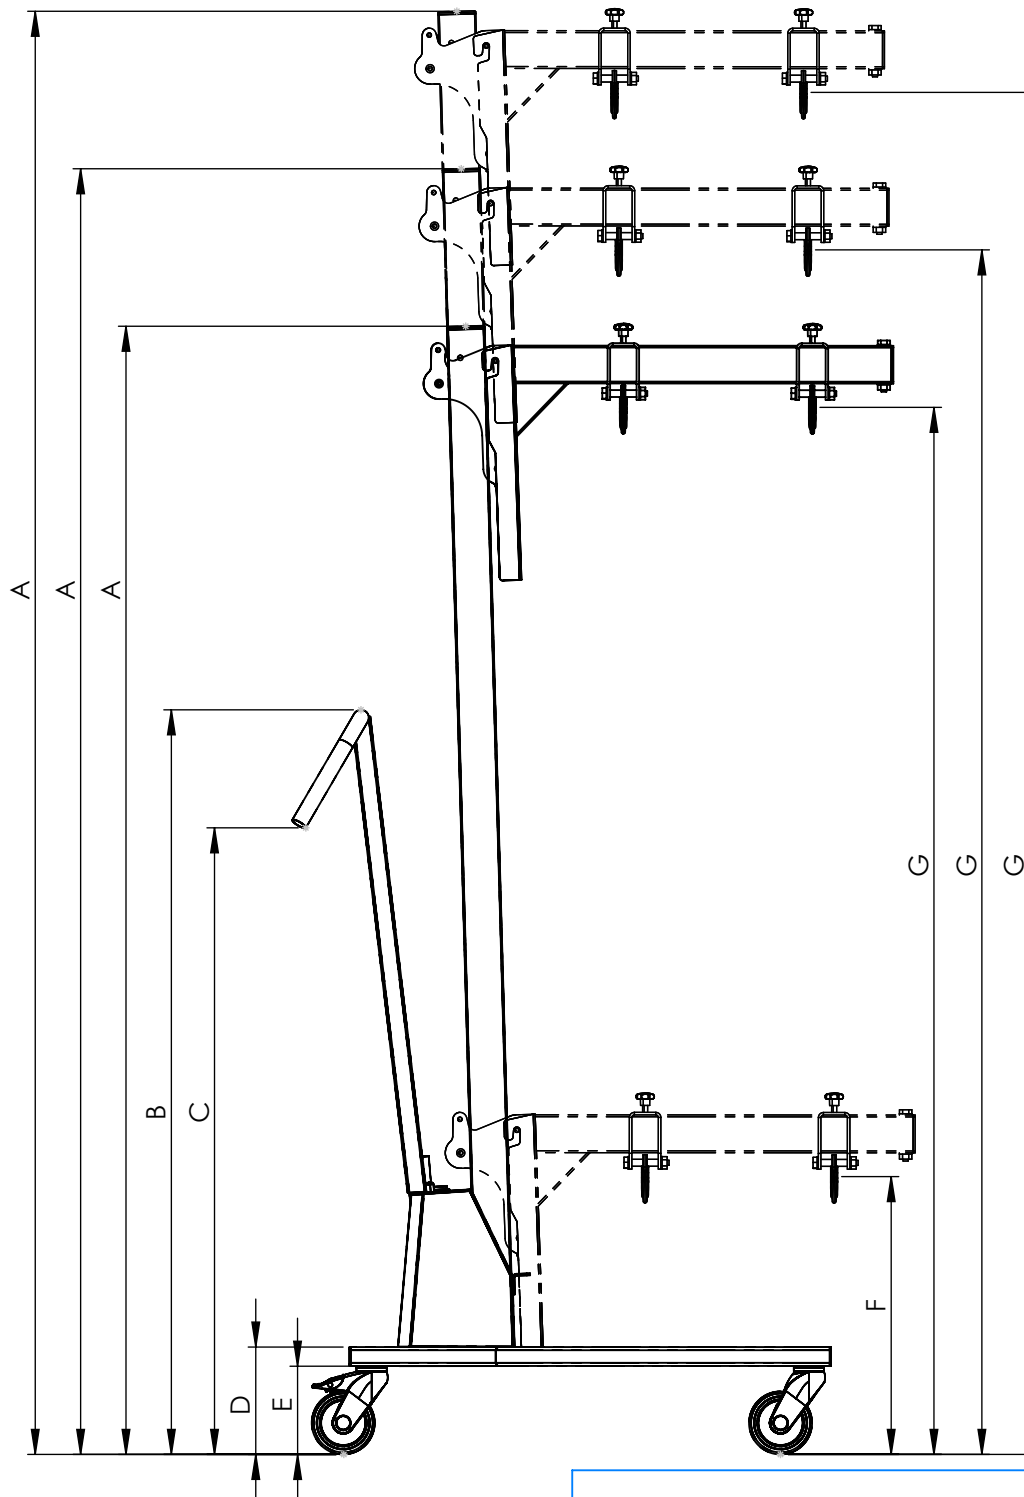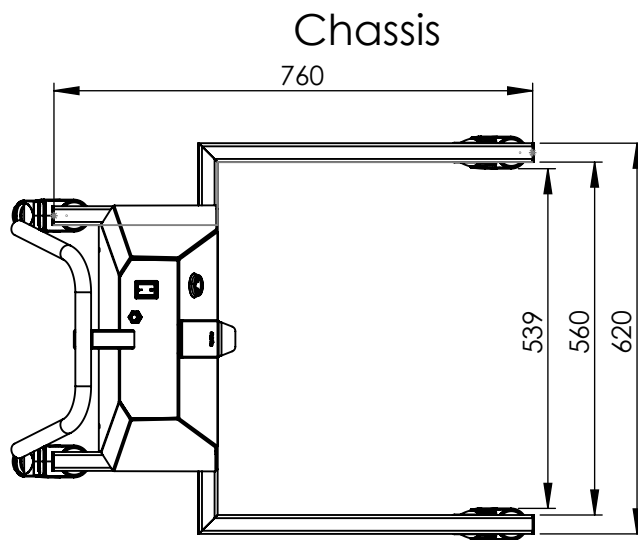

*+-10mm

Depends on battery capacity,
placement of load,
temperature, humidity.

			Wheels	
Standard			Ø100	Ø125
A			1790	1810
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			440	460
G	Load	0 kg	1655	1675
		40 kg	1635	1655
		80 kg	1595	1615
+250 height			Ø100	Ø125
A			2040	2060
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			440	460
G	Load	0 kg	1910	1930
		40 kg	1885	1905
		80 kg	1860	1880
+500 height			Ø100	Ø125
A			2290	2310
B			1180	1200
C			1000	1020
D			170	190
E			140	160
F			440	460
G	Load	0 kg	2155	2175
		40 kg	2125	2145
		80 kg	2075	2095